

**THE**  
**NEW**  
**YORK**  
**PUBLIC**  
**LIBRARY**

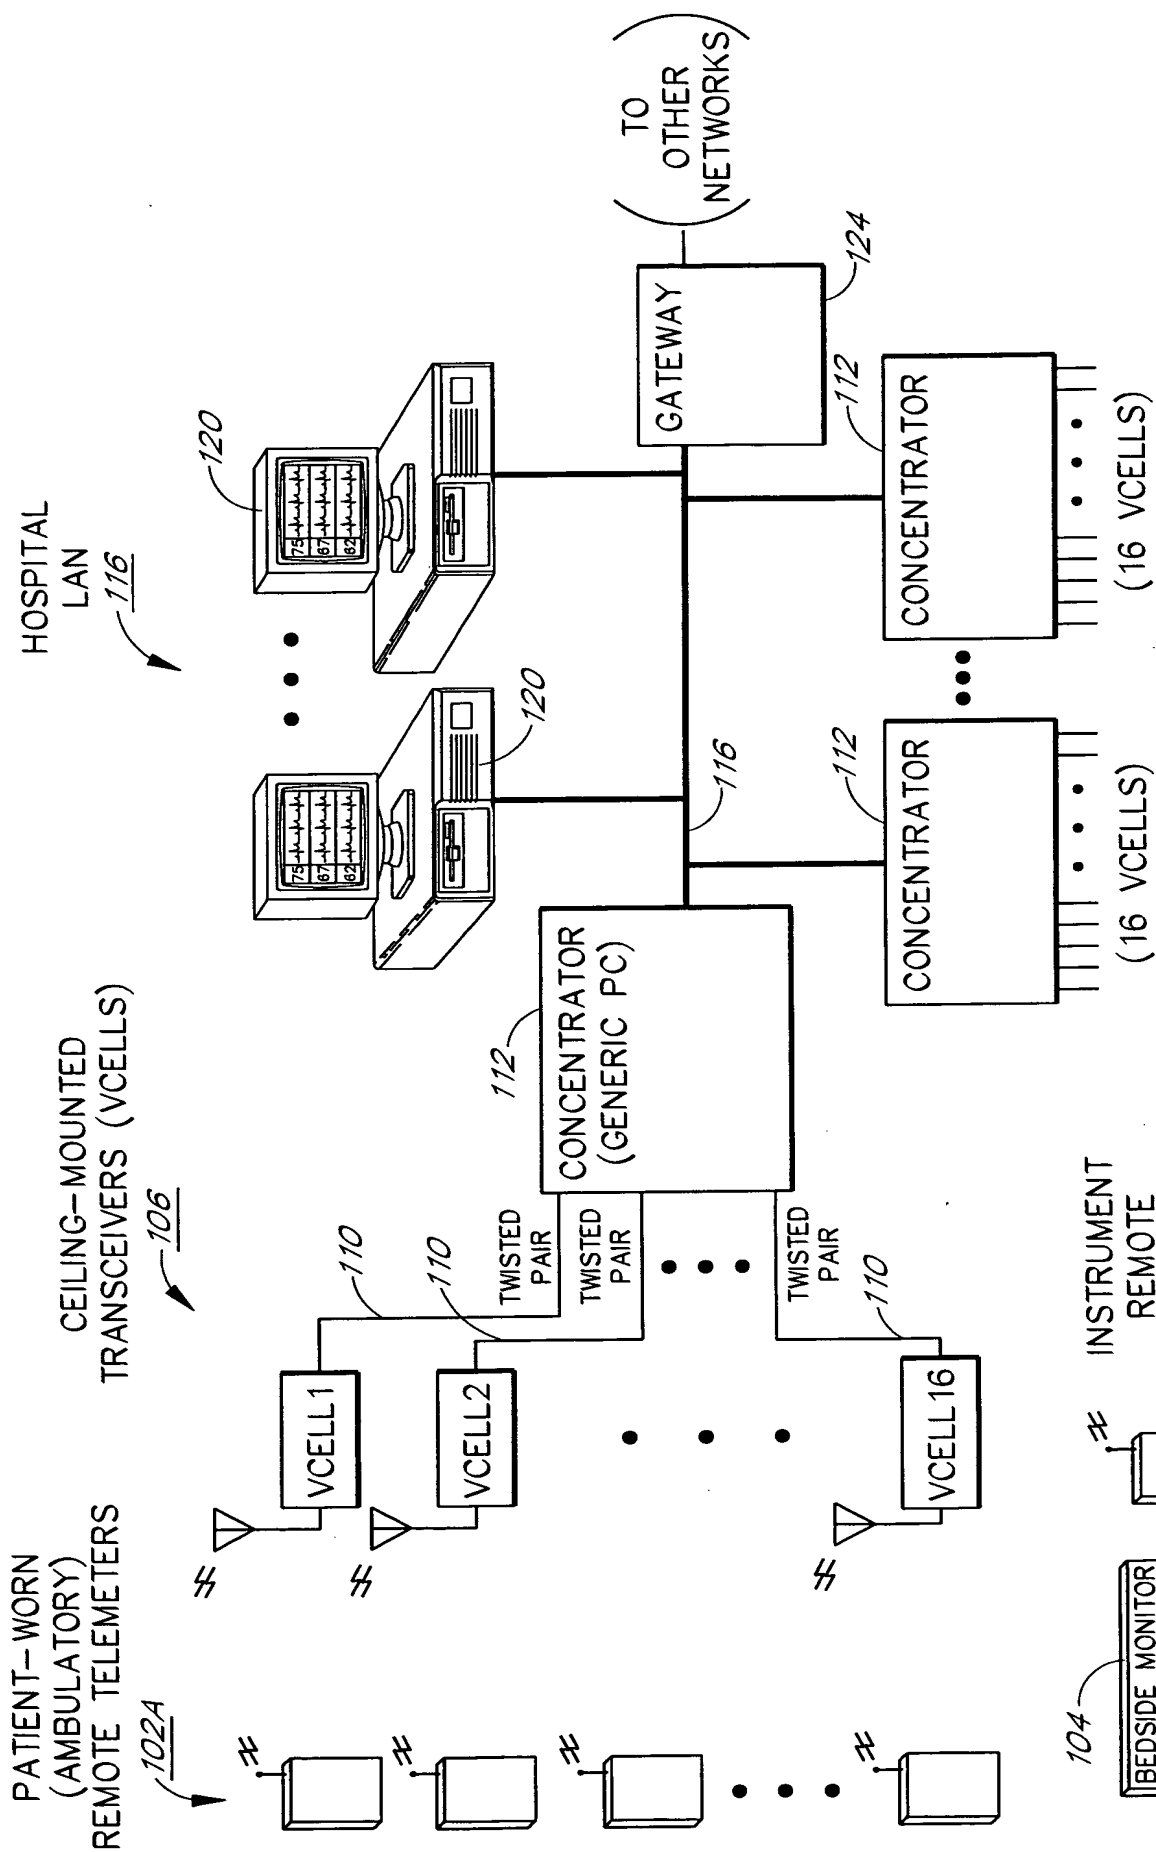


FIG. 1

FIG. 2

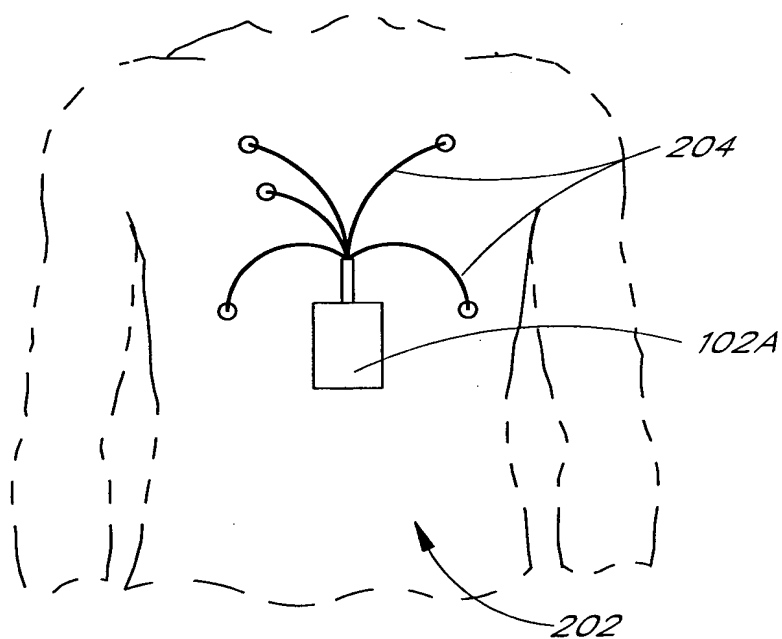


FIG. 2

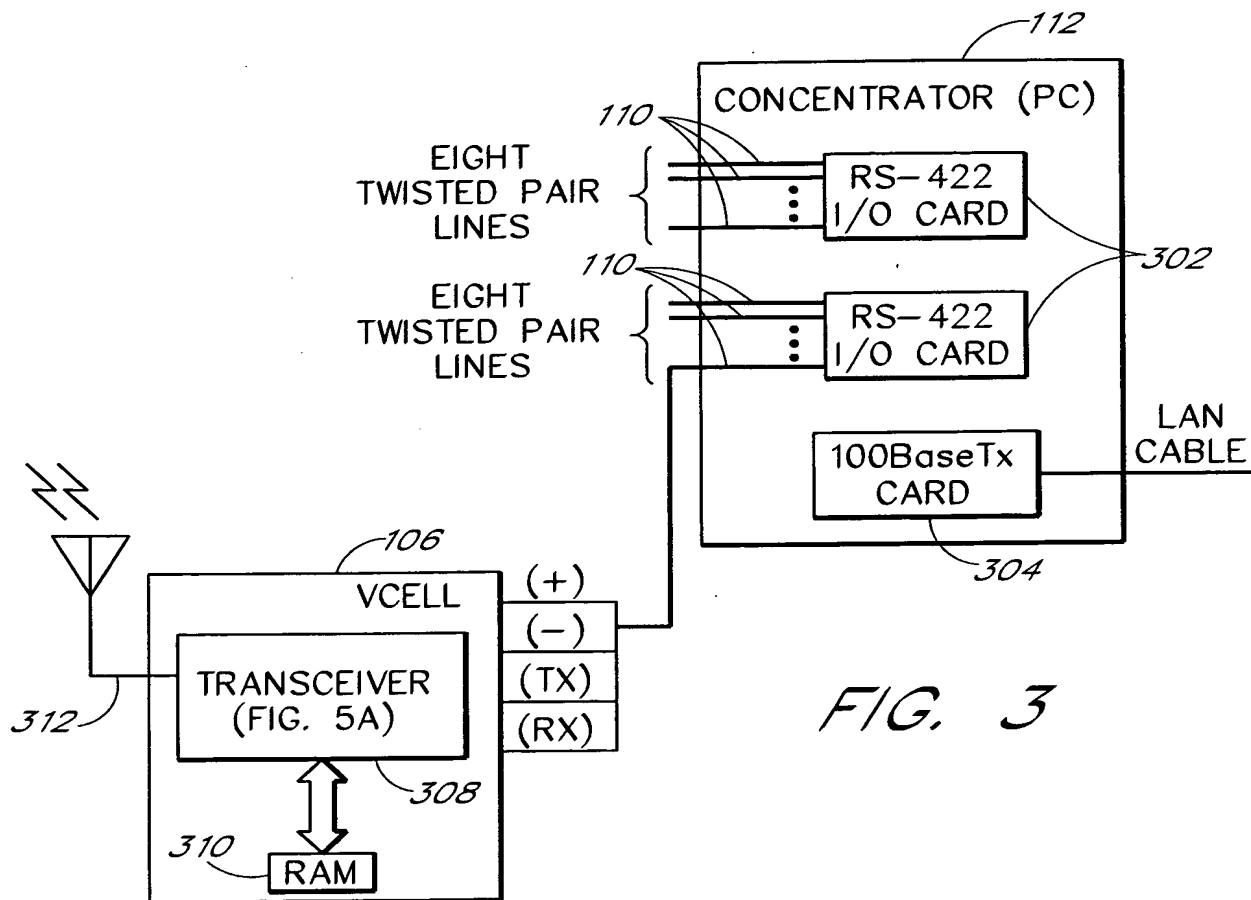


FIG. 3

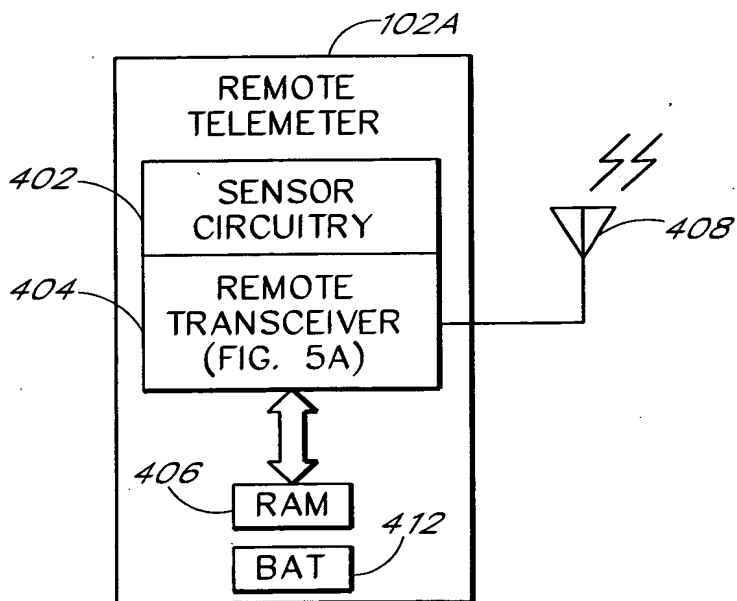


FIG. 4


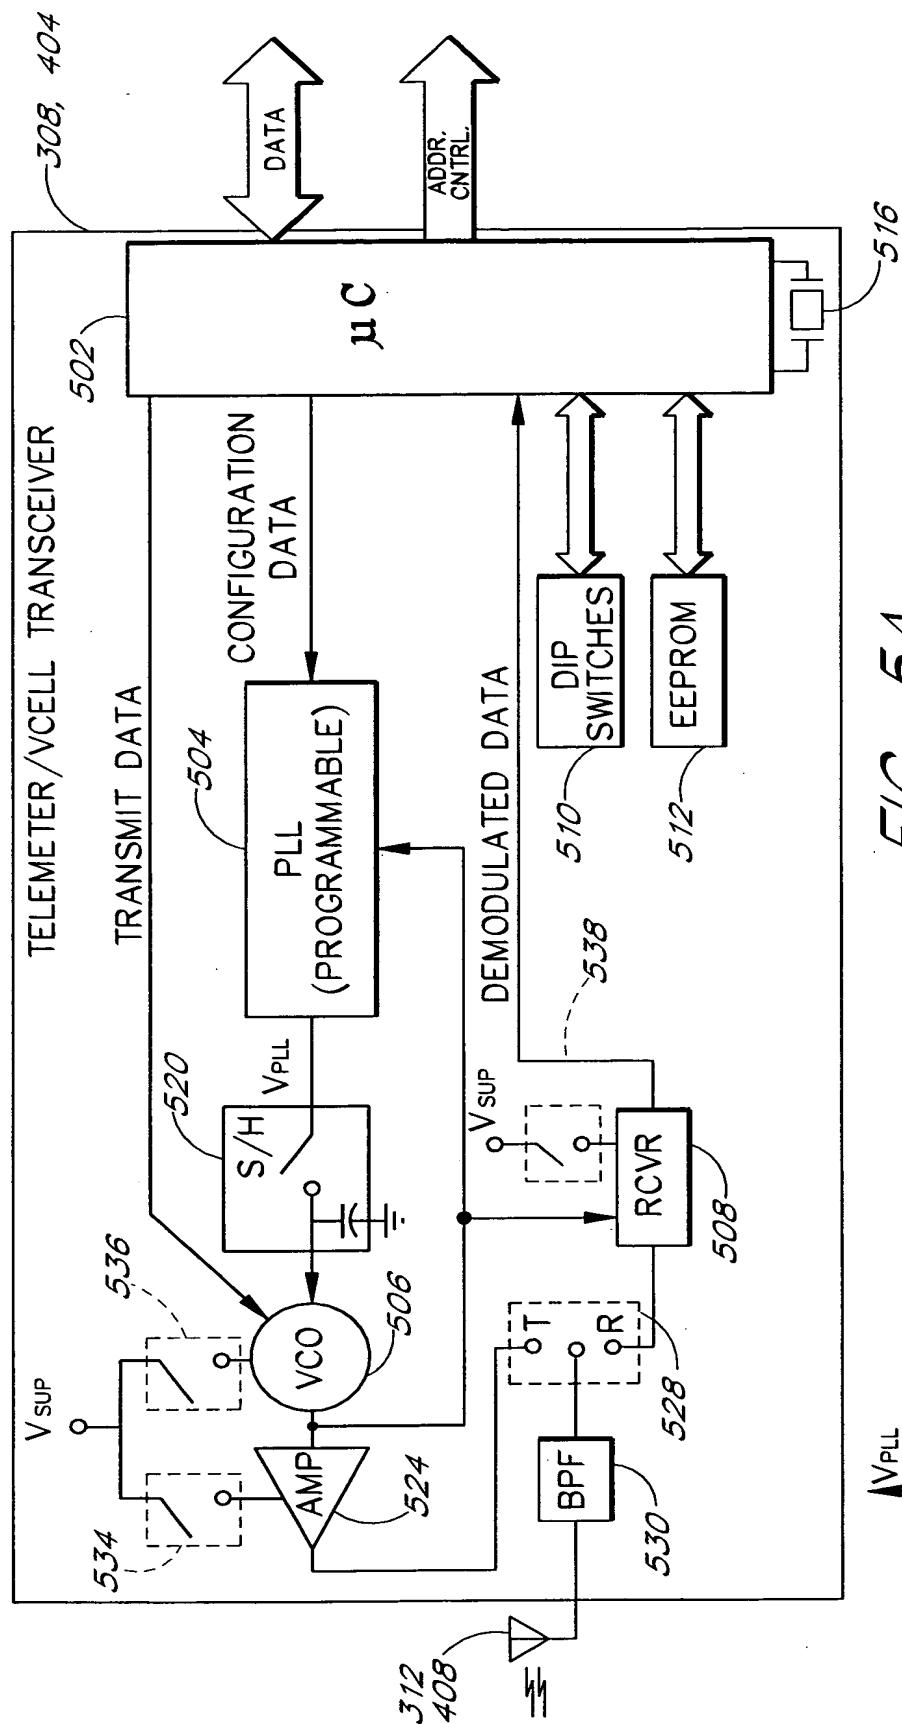
[illegible]

FIG. 5A

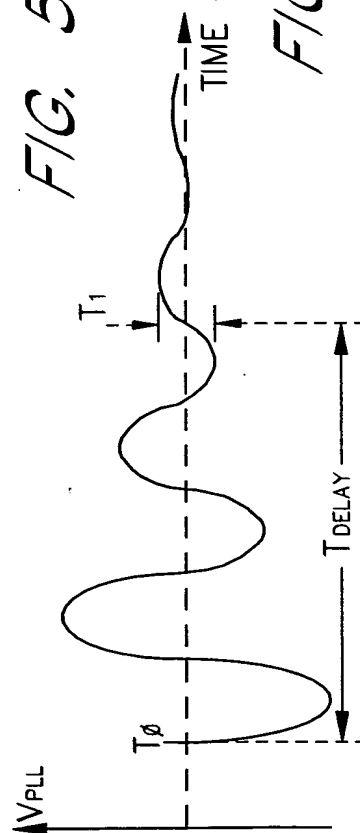

MAXIMUM TRANSMIT POWER (-40dBm)

DYNAMIC RANGE = 50dB  
(SINGLE-ANTENNA VHF SYSTEM)

DYNAMIC RANGE <26dB  
(400 ANTENNA VHF SYSTEM)

DEGRADED NOISE FLOOR

MINIMUM DETECTABLE SIGNAL (-90dBm)

F/G, 6

FIG. 6


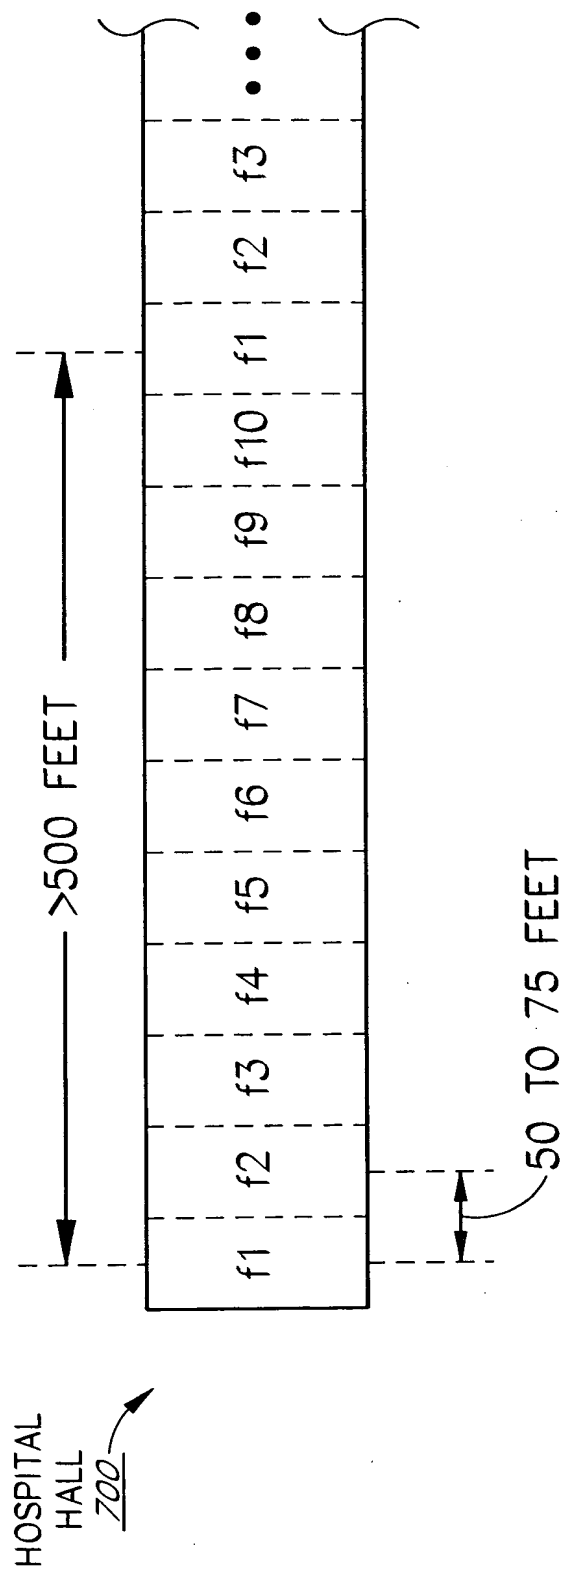


FIG. 7

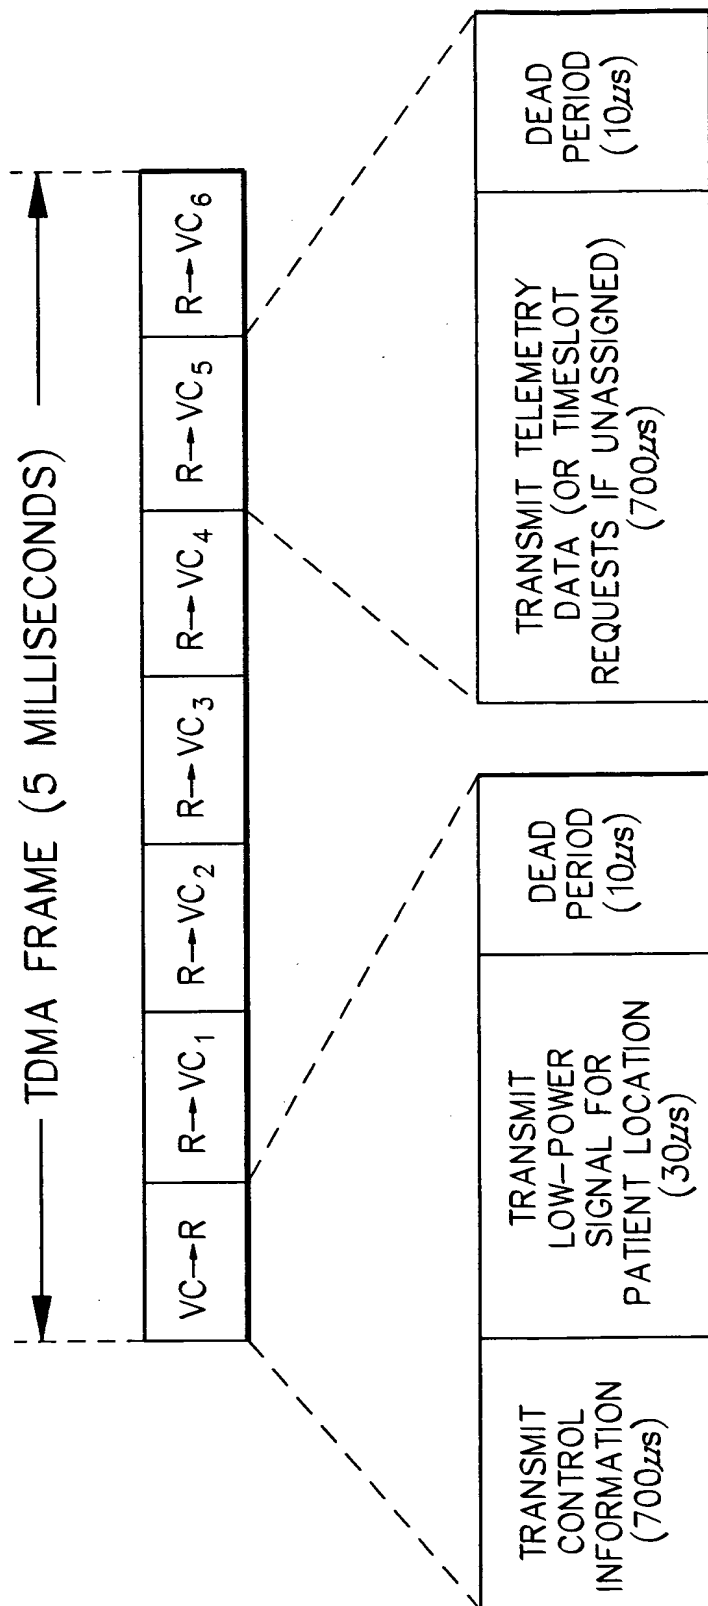

LEGEND

VC = VCELL

R = REMOTE TELEMETER

FIG. 8

TIMESLOT STATUS TABLE

900 →

	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6
ASSIGNED	✓	✓		✓	✓	
FRAMES SINCE LAST PACKET	0	0	(NA)	3	0	(NA)

FIG. 9

VCELL CATALOG

1100 →

	RATING	CONNECTED TO	LOW-PWR. SIGNAL STRENGTH
VCELL1 (f1)	7		1
VCELL2 (f2)	8	✓	9
VCELL3 (f3)	8		6
VCELL4 (f4)	8	✓	6
VCELL5 (f5)	6		1
VCELL6 (f6)	2		0
VCELL7 (f7)	0		0
VCELL8 (f8)	0		0
VCELL9 (f9)	3		0
VCELL10 (f10)	5		1


FIG. 11



POWER-ON  
INITIALIZATION  
(SET ALL R→VC  
TIMESLOTS TO "FREE")

VCELL PROTOCOL  
1000

FIG. 10

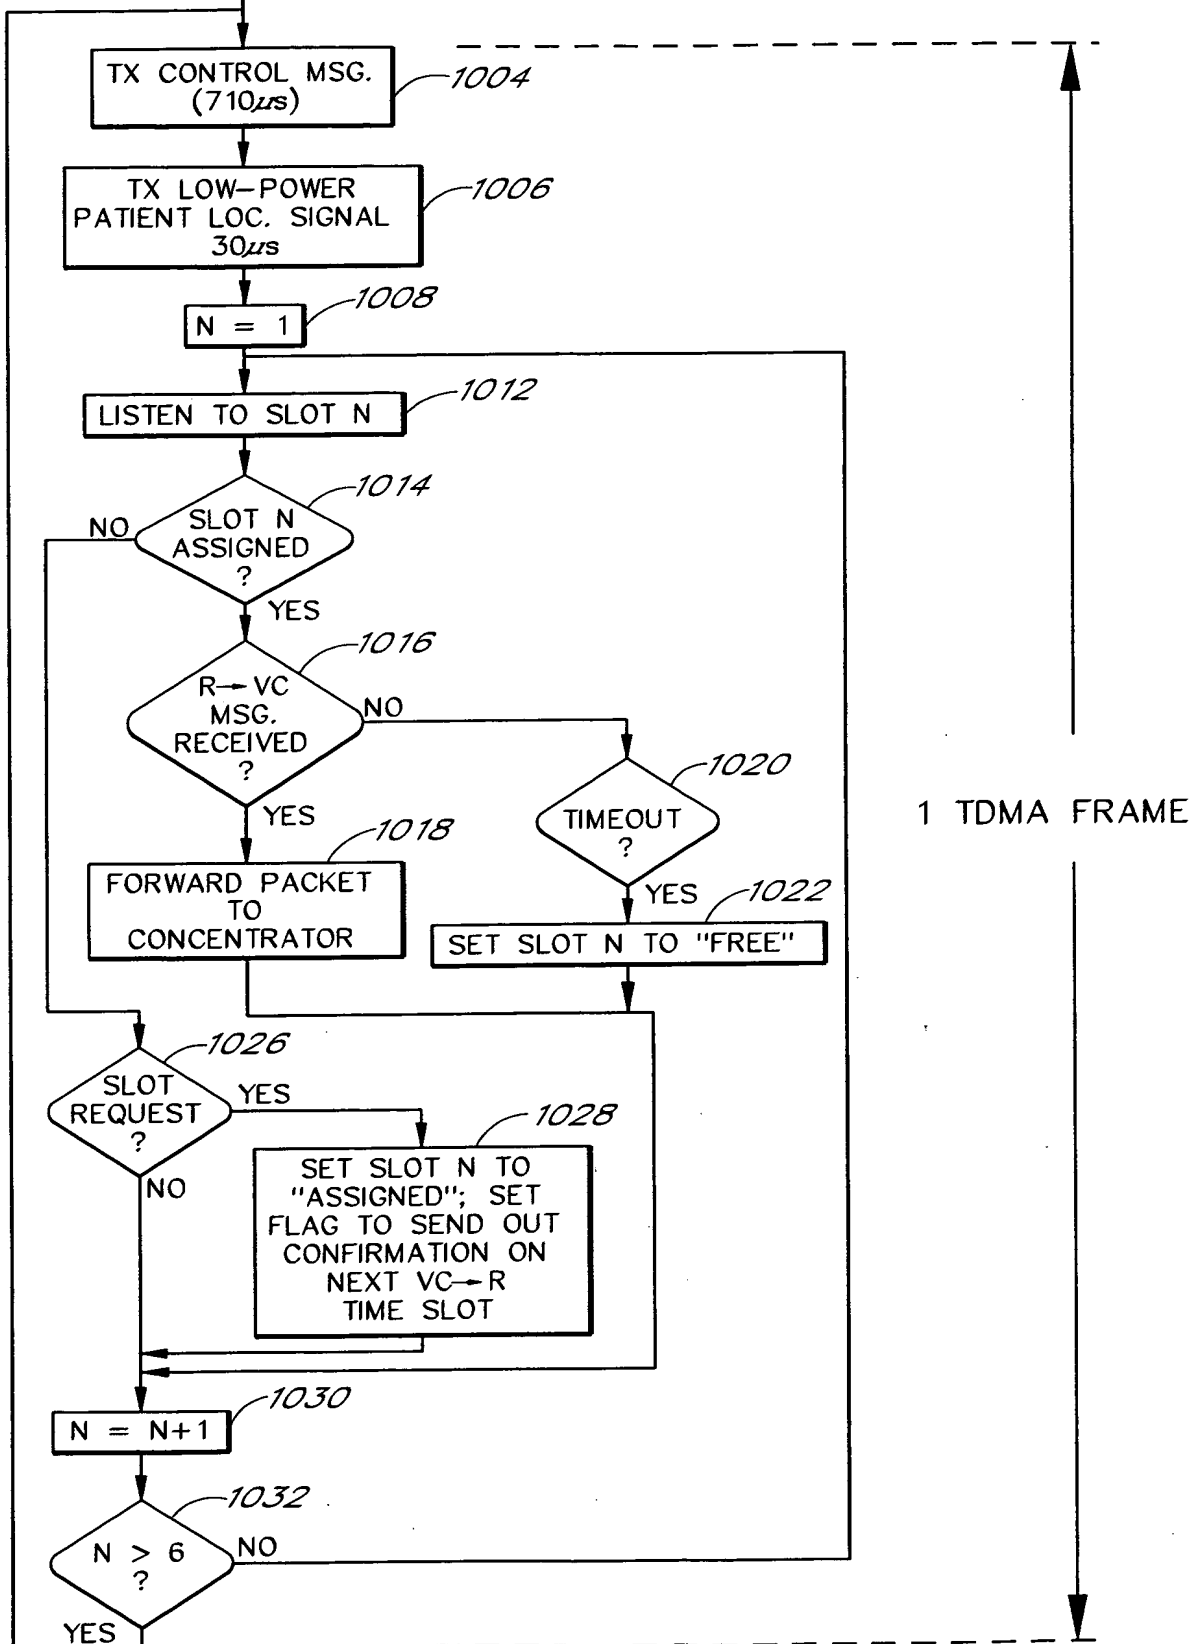

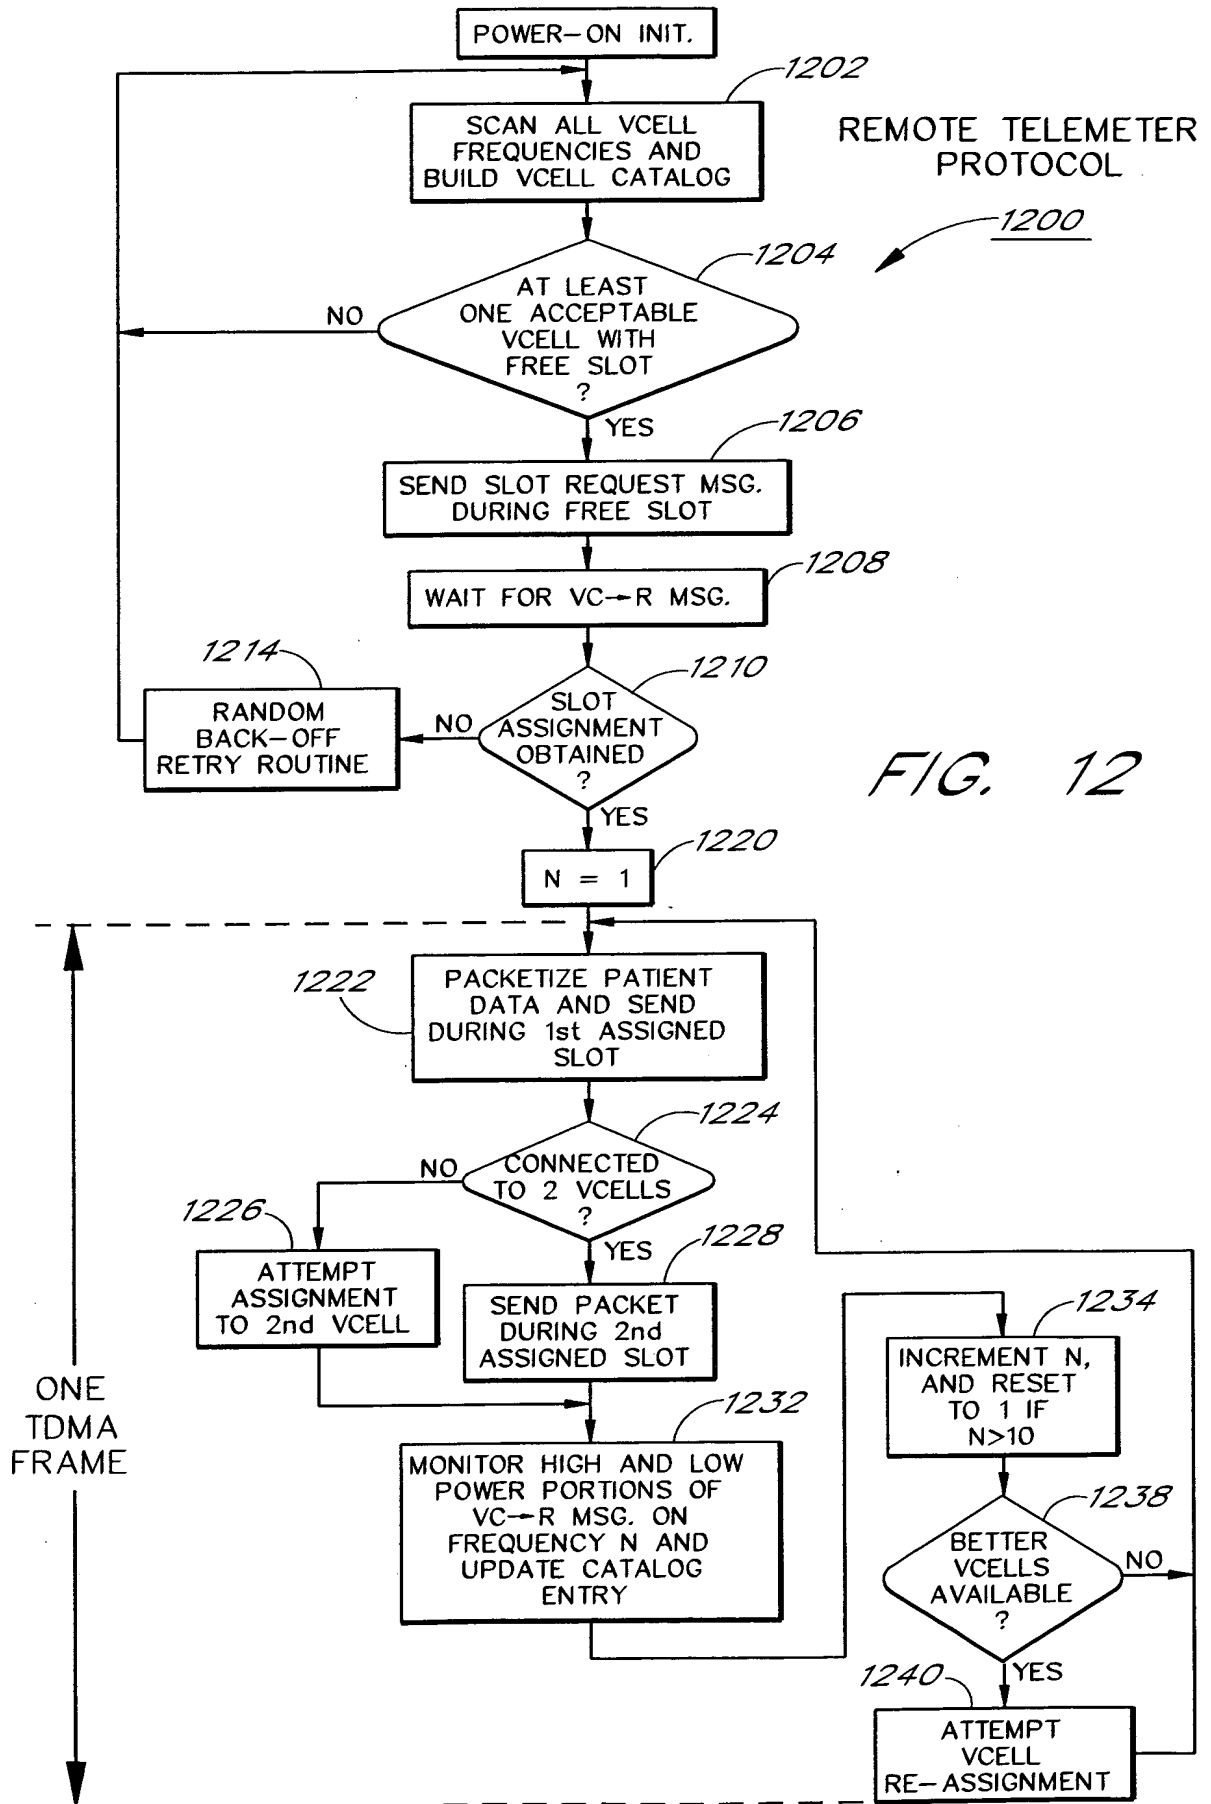


FIG. 12

FIG. 13

